
Abstract

According to the Energy Information Administration, solar power is the least produced form of renewable energy in the United States, and generally is currently used in locations far from the existing electrical grid and large population centers. Because fossil fuels are projected to run dry within 200 years, there is an increased need for renewable energy. If photovoltaic (PV) plants were constructed near major population centers, they could provide a cost effective replacement of power currently generated by fossil fuels. The purpose of this research is to determine the optimal location of potential solar farms taking into account distance from population centers, aspect, PV intensity, and land cost. Using ArcGIS, a suitability map of the Northeast Corridor of the United States was created based on distance to population centers, land usage, and slope direction. Then an estimate of the solar irradiation at each suitable site was calculated. Finally, by using the cost of land, the cost of solar farm installation based off an existing solar farm, an estimated price of PV electricity, and the estimated solar irradiation, the theoretical payoff time of each potential site was calculated. Twenty-four possible sites were located which yielded estimated payoff times of less than five years. The total estimated power output of the entire system was kWh. It was concluded that, because of the low overall power output of the system compared to the US 2008 energy production and imports, solar power was not viable as a large scale fossil fuel power replacement method. Further research is promising in the application of solar power on smaller scale projects such as schools, office buildings, or residential solar installations.


Method

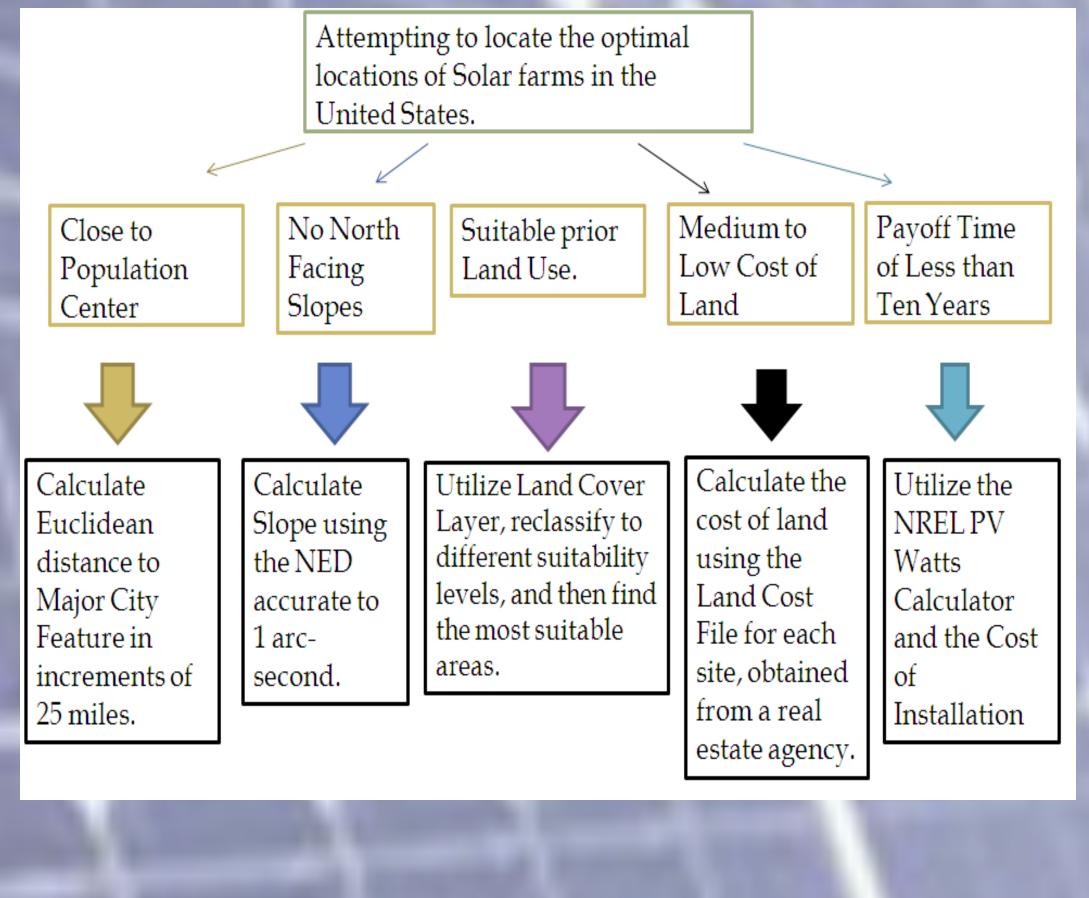


Analyzing the Optimal Location of Solar Farms in the Northeast Corridor

Eric Cawi, Loudoun Academy of Science


Euclidean Distance

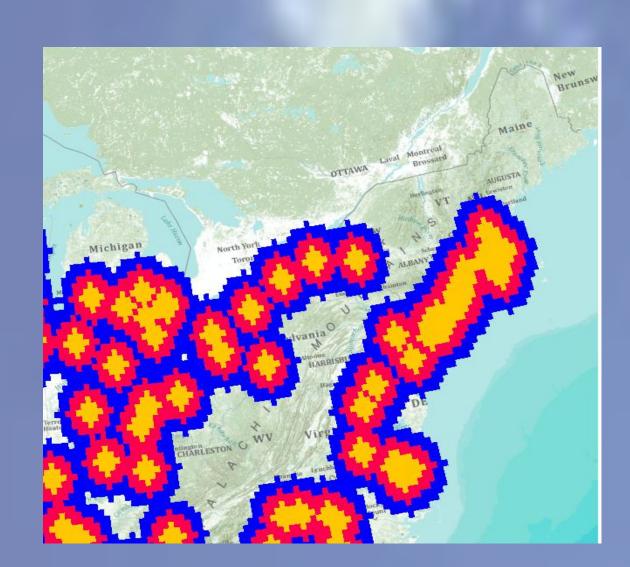


Land Cover

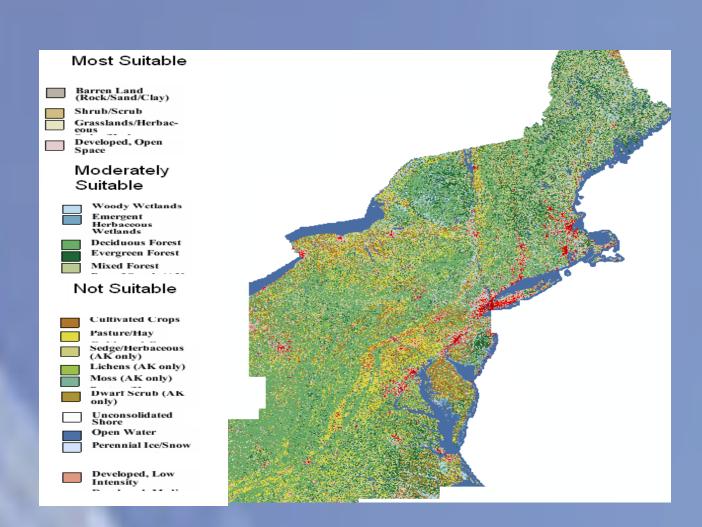


Aspect

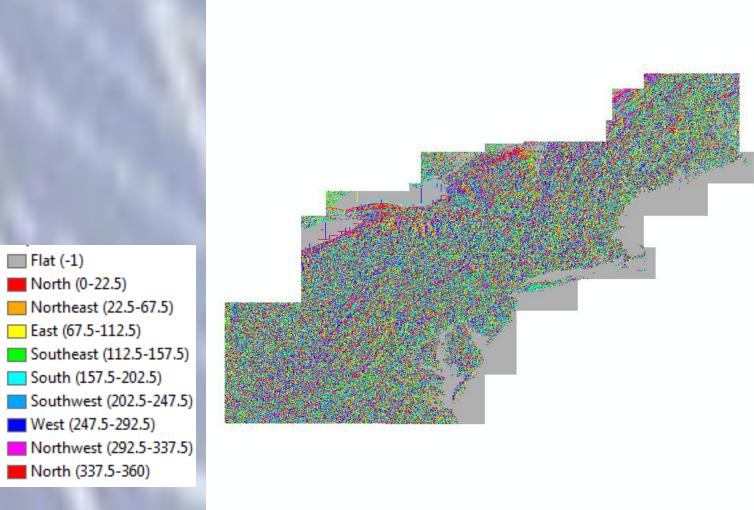

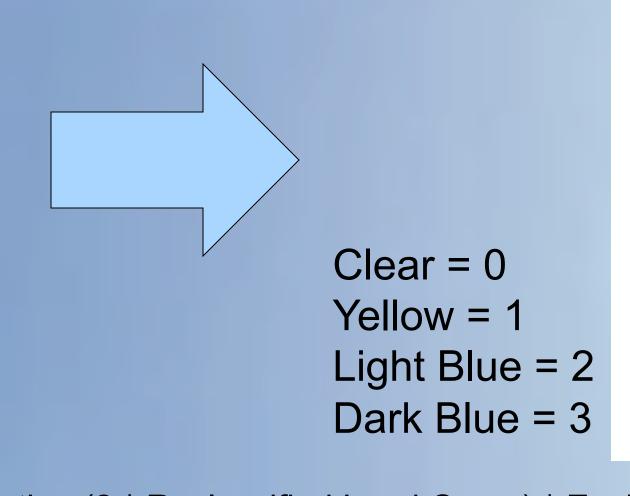

The Reclassified Rasters were combined using the Equation (2 * Reclassified Land Cover) * Euclidean Distance Reclassifed * Aspect Reclassified. This gives double weight to the land usage while also eliminating all areas of zero suitability in any of the maps. Then all of the sites with the highest calculated suitability value were selected and labeled for analysis.

Combined Suitability

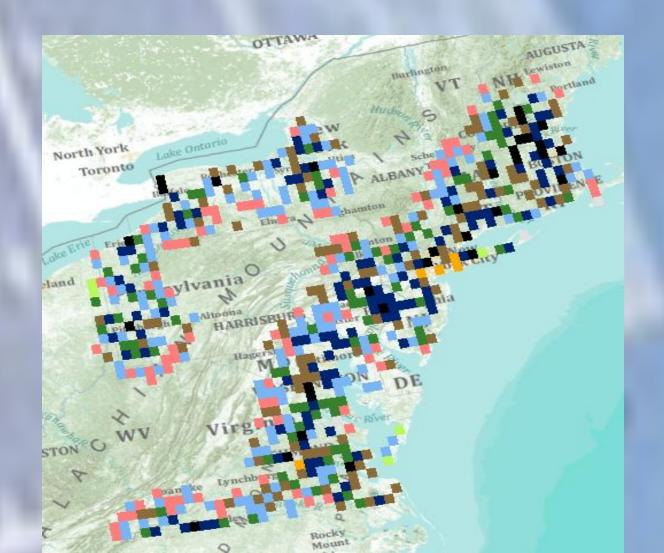

Sites for Analysis

Euclidean Distance Reclassified

Land Cover Reclassified

Aspect Reclassified

Clear = 0

Yellow = 1

Light Blue = 2

Dark Blue = 3

Clear = 0

Yellow = 1


Light Blue = 2

Dark Blue = 3



Results and Conclusion

Site Analysis

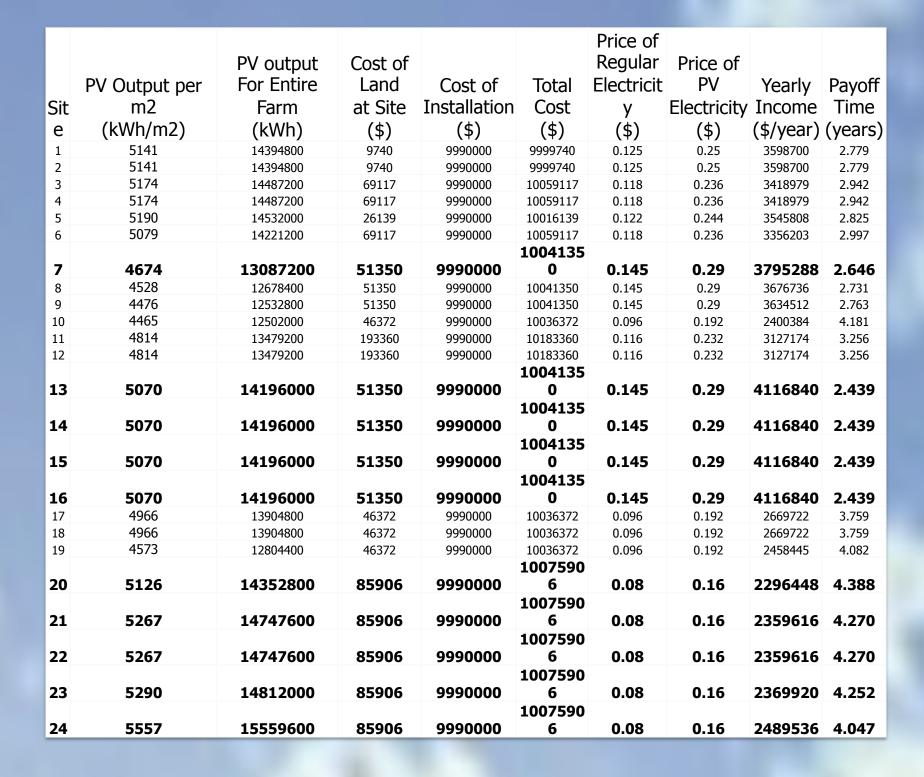

System Analysis

| Total PV Output (kWh) | EIA Estimated 2008 Energy Output (Quadrillion BTU) | EIA Estimated Energy Imports (Quadrillion btu) | EIA Estimated 2008 Energy Output (kWh) | EIA Estimated Energy Imports (kWh) | % of Estimated Energy Output | % of Imported Energy | Yearly Electricity Use Per Person (Million btu) | Yearly Electricty Use Per Person (kWh) | People Supporte through the enting system |
|-----------------------------|--|--|--|--|---------------------------------------|----------------------------|--|--|---|
| 335893600 | 73 | 30 | 2.1389E+13 | 8.79E+12 | 0.00157 | 0.00382 | 308 | 90244 | 3722 |

Conclusions

All of the sites had a payoff time of less than ten years, so they can be considered feasible.

Top Five Solar Potential Sites: 13, 14, 15, 16, 7 Top Five Payoff Times: 24, 23, 22, 21, 20

However, the entire system only supports 3,722 people, and didn't "replace" a significant amount of either power production or imports.

While it is economically feasible, solar power simply isn't very efficient on a macro scale.

On a micro scale, such as rooftops on small towns or a small business, it has potential to be an effective investment and power source.

Sources of Error: The cost of installation was assumed to be constant, but in reality local costs will be either cheaper or more expensive than the estimate. Also, the NREL uses statistical data to estimate the power output at each location. The actual yearly power output will be either lower or higher than the estimate.

Works Cited

vol. 54 (8), p. 2595-2620; data located at Land and Property Values in the U.S., Lincoln Institute of Land Po National Renewable Energy Laboratory (2009, June 5). Dynamic Maps, GIS Data, and Analysis Tools. Retrieved September 27, 2009 from http://www.nrel.gov/gis/solar.html Shafiee, S., Topal, E. (2009) When will fossil fuels reserves be diminished? Energy Policy, 37, 181-189. Retrieved from Science Direct Database